



浙江普照电器有限公司
ZHEJIANG PO-LIGHT ELECTRICAL APPLIANCE CO.,LTD

地址:浙江省温岭市石桥头镇工业区菜场路9号

Add: NO.9 Caichang Road, Industrial Park of Shiqiaotou Town,Wenling City,Zhejiang,China

电话/Tel:86-576-86288988 传真/Fax:86-576-86289858

Http://www.puzhao-light.com Http://puzhao.en.alibaba.com

E-mail:puzhao@puzhao-light.com

广东分公司地址: 广东省江门市江海区高新东路33号亮美工业园4楼

Branch Add : Floor 4 of Liangmei Industrial Park,NO.33 East Gaoxin Road,Jianghai Area,Jiangmen City,Guangdong,China

电话/Tel: 0750-3762329



PUZHAO
普照电器
T-POLUX LIGHT



产品目录 **2020-1**
PRODUCT CATALOG

LED照明灯具专业生产商
LED lighting fixture manufacturer

T-POLUX LIGHT CULTURE

普照企业文化

企业愿景 Vision

幸福之光，普照万家。
The light of happiness, light up every corner.

企业使命 Mission

让照明更环保更节能更安全。
Make lighting more environmentally friendly and safer.

企业精神 Spirit

敢为、务实、高效、专注、和谐。
Be brave、pragmatic、high efficiency、dedicated、harmonious.

管理理念 Management philosophy

数据化、信息化、细致化、责任化、规范化。
Digital, informative, meticulous, accountable and normative.

工作理念 Work concept

今天要比昨天好，明天要比今天好。
Today is better than tomorrow, tomorrow is much better than today.

发展理念 Development concept

服务客户，精准求实，众志成城，致和致远。
Service customers, accuracy and truth-seeking, strength union.

Contents 目录

01-02 企业概况 Brief introduction

03-14 三防灯系列 Waterproof lighting fixture

15-21 净化灯系列 Dustproof lighting fixture

22-24 吸顶灯 LED ceiling lamp

25-30 面板灯 LED Panel light

31 工矿灯 LED High Bay light

32 灯管 LED Tube



企业概况 Brief introduction

普照电器创建于1989年,集研发、生产、销售于一体的LED照明灯具企业,以让照明更环保更节能更安全为企业使命,以幸福之光,普照万家为企业愿景,以服务客户,精准求实,众志成城,致和致远的经营发展理念。时刻以用户的需求为己任,创立的普照品牌,深受国内外消费者的好评。

普照电器始终坚持以品质为根本,技术创新为驱动力,以敢为、务实、高效、专注、和谐为企业精神,以高执行力的方针,陆续开发与生产出三防灯,支架灯,净化灯,LED面板灯,LED投光灯,吸顶灯等产品,力争成为国内LED照明灯具行业的主导企业之一,引进现代化先进的管理理念,通过ISO质量管理认证,CCC认证,BSCI认证,CE认证,SAA认证以及环保认证等。

我们衷心希望与您搭建友谊之桥,并诚挚地欢迎您能够亲临普照电器。



Zhejiang PO-Light Electrical Appliance Co.,Ltd was founded in 1989,which is a LED lighting fixture company with R&D、producing and sale as a whole.To make more environmental protection and energy saving lighting safer for the enterprise mission.In the light of happiness to light up every corner for enterprise vision.To service customers, accuracy and truth-seeking, strength union of the business development philosophy. To take the user's needs as own responsibility. And the established brand deeply praised by domestic and foreign consumers.

PO-Light always insist on quality as a fundamental,technological innovation as the driving force,be brave、pragmatic、high efficiency、dedicated and harmonious as spirit,high execution as policy to develop and produce waterproof lamp, batten fitting, purifying lamp, LED panel light, LED flood light, ceiling light, etc. Striving to become one of the leading enterprises of the domestic LED lighting lamps.Introducing modern and advanced management philosophy. Have passed ISO quality management certification,CCC,BSCI,CE,SAA and environmental certification etc.

PO-Light sincerely welcome and hope to build a bridge of friendship with you.



ISO9001:2015 CE CCC RoHS REACH amfori BSCI



依据完善的ISO9001/2000质量和环境管理体系,通过执行严格的产品标准和完善的检验手段,造就普照质量稳定、符合标准的卓越品质,实现品质由表及里的高度完美。

According to environmental management system and perfect ISO9001/2000 quality,through the implementation of strict product standards and perfect inspection means, make stable quality of PO-Light, conform to the standard of excellent quality, achieve the highly perfect of the quality.

生产车间实行6S现场管理,对产品的原料、生产过程和包装等工序进行严格的监控,并对每个产品制定有效的质量标准,确保产品的质量及生产的一致性。

Production workshop for 6S on-site management, strict controls to raw materials、production process、packing and etc, make effective quality standards for each product to ensure the consistency of product quality and production.

PZ – AA–T8–236

MAIN FEATURES

Body: PC,ABS,HIPS Diffuser: PC, PS Reflector: Steel white
Lamp type:T8 IP: 65 Cable gland: PG11
Applications: Factories, corridors, supermarket,school, hospital,
underground car park, store, tunnel, overpass and etc.



PZ – AA–T8–136

MAIN FEATURES

Body: PC,ABS,HIPS Diffuser: PC, PS Reflector: Steel white
Lamp type:T8 IP: 65 Cable gland: PG11
Applications: Factories, corridors, supermarket,school, hospital,
underground car park, store, tunnel, overpass and etc.



Model	Size(mm)	CTN Size(mm)/pcs
PZ-AA-T8-118	658*86*87mm	690*270*200 /8PCS
PZ-AA-T8-218	658*118*87mm	690*200*265 /6PCS
PZ-AA-T8-136	1267*86*87mm	1290*270*200 /8PCS
PZ-AA-T8-236	1267*118*87mm	1290*270*265 /6PCS
PZ-AA-T8-158	1565*86*87mm	1595*270*200 /8PCS
PZ-AA-T8-258	1565*118*87mm	1595*270*265 /6PCS

PZ – AC–SMD–236

MAIN FEATURES

Body: PC,ABS Diffuser: FROSTED PC Reflector: Aluminum
IP:65 Cable gland: PG11
Applications: Factories, corridors, supermarket,school, hospital,
underground car park, store, tunnel, overpass and etc.



PZ – AC–SMD–136

MAIN FEATURES

Body: PC,ABS Diffuser: FROSTED PC Reflector: Aluminum
IP:65 Cable gland: PG11
Applications: Factories, corridors, supermarket,school, hospital,
underground car park, store, tunnel, overpass and etc.



Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-AC-SMD-280	70-80W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1865 *118*87	1885*270*265/6PCS
PZ-AC-SMD-258	54-58W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1565 *118*87	1595*270*265/6PCS
PZ-AC-SMD-236	36-40W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1267 *118*87	1290*270*265/6PCS
PZ-AC-SMD-218	18-20W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	658*118*87	690*270*265/6PCS
PZ-AC-SMD-180	35-40W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1865*86*87	1885*340*200/8PCS
PZ-AC-SMD-158	30W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1565*86*87	1595*340*200/8PCS
PZ-AC-SMD-136	18-20W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1267*86*87	1290*340*200/8PCS
PZ-AC-SMD-118	9-10W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	658*86*87	690*340*200/8PCS

PZ-CA-T8-236

MAIN FEATURES

Body: PC, ABS, HIPS Diffuser: PC, PS Reflector: Steel white
Lamp type: T5, T8 IP: 65 Cable gland: PG11
Applications: Factories, corridors, supermarket, school, hospital, underground car park, store, tunnel, overpass and etc.



PZ-CB-SMD-236

MAIN FEATURES

Body: PC, ABS, HIPS Diffuser: PC, PS Cable gland: PG11
Reflector: Steel white IP: 65
Applications: Factories, corridors, supermarket, school, hospital, underground car park, store, tunnel, overpass and etc.



PZ-CA-T8-136

MAIN FEATURES

Body: PC, ABS, HIPS Diffuser: PC, PS Reflector: Steel white
Lamp type: T5, T8 IP: 65 Cable gland: PG11
Applications: Factories, corridors, supermarket, school, hospital, underground car park, store, tunnel, overpass and etc.



PZ-CB-SMD-136

MAIN FEATURES

Body: PC, ABS, HIPS Diffuser: PC, PS Cable gland: PG11
Reflector: Steel white IP: 65
Applications: Factories, corridors, supermarket, school, hospital, underground car park, store, tunnel, overpass and etc.



Model	Size(mm)	CTN Size(mm)/pcs
PZ-CA-T8-118	661*69*83mm	680*260*165 /8PCS
PZ-CA-T8-218	661*112*83mm	680*200*245 /6PCS
PZ-CA-T8-136	1265*69*83mm	1285*260*165 /8PCS
PZ-CA-T8-236	1265*112*83mm	1285*200*245 /6PCS
PZ-CA-T8-158	1566*69*83mm	1590*260*165 /8PCS
PZ-CA-T8-258	1566*112*83mm	1590*200*245 /6PCS

Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	Packing Size/PCS
PZ-CB-SMD-118	9W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	661*69*85mm	680*375*165/8PCS
PZ-CB-SMD-218	18W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	661*112*85mm	680*295*245/6PCS
PZ-CB-SMD-136	18W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1265*69*85mm	1280*375*165/8PCS
PZ-CB-SMD-236	36W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1265*112*85mm	1280*295*245/6PCS
PZ-CB-SMD-158	30W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1566*69*85mm	1590*375*165/8PCS
PZ-CB-SMD-258	58W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1566*112*85mm	1590*295*245/6PCS

PZ-D-T8-236

MAIN FEATURES


Body: PC,ABS,HIPS Diffuser: PC, PS Reflector: Steel white
Lamp type:T8 IP: 65 Cable gland: PG11
Applications: Factories, corridors, supermarket,school, hospital,
underground car park, store, tunnel, overpass and etc.



PZ-D-T8-136

MAIN FEATURES

Body: PC,ABS,HIPS Diffuser: PC, PS Reflector: Steel white
Lamp type:T8 IP: 65 Cable gland: PG11
Applications: Factories, corridors, supermarket,school, hospital,
underground car park, store, tunnel, overpass and etc.

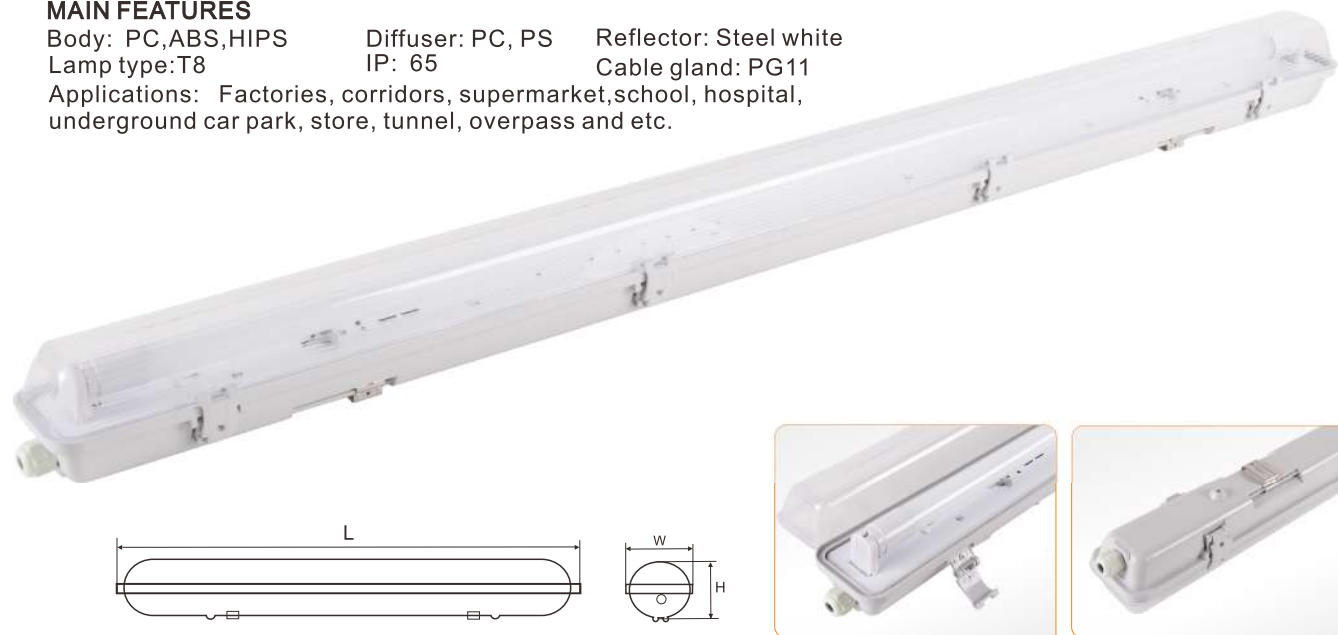


Model	Size(mm)	CTN Size(mm)/pcs
PZ-D-T8-118	660*82*90	680*275*190 /8PCS
PZ-D-T8-218	660*122*90	680*275*270 /6PCS
PZ-D-T8-136	1270*82*90	1290*275*190 /8PCS
PZ-D-T8-236	1270*122*90	1290*210*270 /6PCS

PZ-E-SMD-236

MAIN FEATURES

Body: PC,ABS,HIPS Diffuser: PC, PS Reflector: Steel white
IP: 65 Cable gland: PG11
Applications: Factories, corridors, supermarket,school, hospital,
underground car park, store, tunnel, overpass and etc.

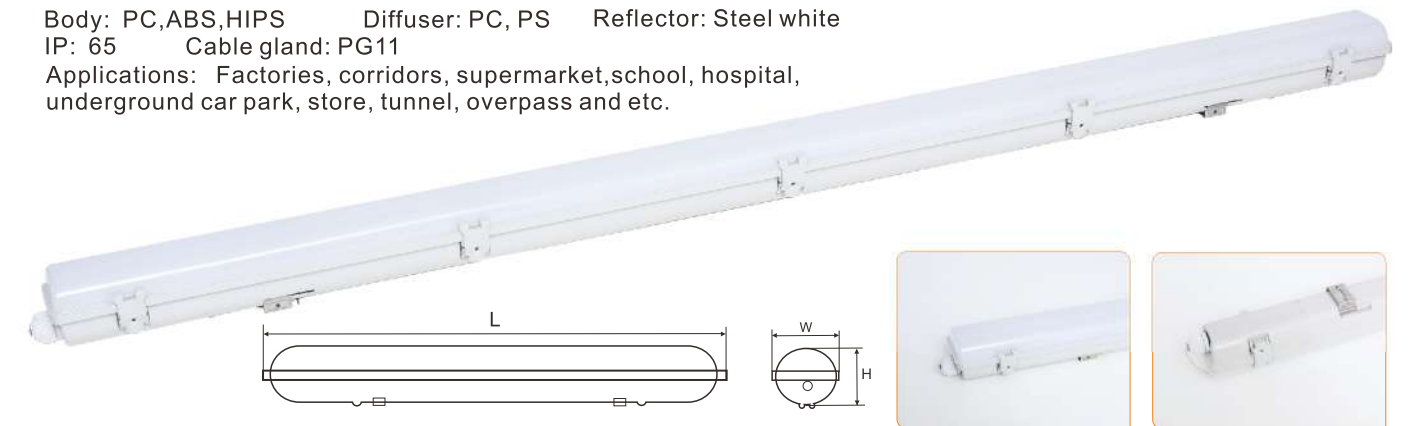

Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-E-SMD-218	18W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	600*71*58	630*265*165/8PCS
PZ-E-SMD-236	36W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1200*71*58	1230*265*165/8PCS
PZ-E-SMD-258	54W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1500*71*58	1530*265*165/8PCS

PZ-F-SMD-236

MAIN FEATURES

Body: PC,ABS,HIPS Diffuser: PC, PS Reflector: Steel white
IP: 65 Cable gland: PG11
Applications: Factories, corridors, supermarket,school, hospital,
underground car park, store, tunnel, overpass and etc.



Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-F-SMD-218	18W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	600*90*65	620*306*210/8PCS
PZ-F-SMD-236	36W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1200*90*65	1220*306*210/8PCS
PZ-F-SMD-258	58W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1500*90*65	1520*306*210/8PCS



PZ-H-T8-236

MAIN FEATURES

Body:PC,ABS,HIPS Diffuser: PC, PS Reflector: Steel white
Lamp type:T8 IP:65 Cable gland: PG11
Applications: Factories, corridors, supermarket,school, hospital,
underground car park, store, tunnel, overpass and etc.



Model	Size(mm)	CTN Size(mm)/pcs
PZ-H-T8-258	1570*113*50	1585*325*245/10PCS
PZ-H-T8-158	1570*68*50	1585*325*165/10PCS
PZ-H-T8-236	1270*113*50	1285*325*245/10PCS
PZ-H-T8-136	1270*68*50	1285*325*165/10PCS
PZ-H-T8-218	67.5*113*50	68*325*245/10PCS
PZ-H-T8-118	67.5*68*50	68*325*165/10PCS

PZ-JA-T8-236

MAIN FEATURES

Body: PC,ABS,HIPS Diffuser: PC, PS Reflector: Steel white
Lamp type:T8 IP: 65 Cable gland: PG11
Applications: Factories, corridors, supermarket,school, hospital,
underground car park, store, tunnel, overpass and etc.



Model	Size(mm)	CTN Size(mm)/pcs
PZ-JA-T8-118	662*71*71mm	680*280*150/10PCS
PZ-JA-T8-218	662*103*71mm	680*280*220/10PCS
PZ-JA-T8-136	1262*71*71mm	1280*280*150/10PCS
PZ-JA-T8-236	1262*103*71mm	1280*280*220/10PCS
PZ-JA-T8-158	1562*71*71mm	1580*280*150/10PCS
PZ-JA-T8-258	1562*103*71mm	1580*280*220/10PCS

PZ-JB-T8-236

MAIN FEATURES

Body: PC,ABS,HIPS Diffuser: PC, PS Cable gland: PG11
Lamp type:T8 IP: 65
Applications: Factories, corridors, supermarket,school, hospital,
underground car park, store, tunnel, overpass and etc.



Model	Size(mm)	CTN Size(mm)/pcs
PZ-JB-T8-136	1262*71*71mm	1280*210*150/8PCS
PZ-JB-T8-236	1262*103*71mm	1280*160*220/6PCS
PZ-JB-T8-258	1562*103*71mm	1580*160*220/6PCS

PZ-JC-SMD-236

MAIN FEATURES

Body: PC,ABS,HIPS Diffuser: PC, PS Reflector: Steel white
IP: 65 Cable gland: PG11
Applications: Factories, corridors, supermarket,school, hospital,
underground car park, store, tunnel, overpass and etc.



Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-JC-SMD-236	36W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1262*103*66mm	1282*280*220/8PCS

PZ-O-T8-236

MAIN FEATURES

Body: PC,ABS,HIPS Diffuser: PC, PS Reflector: Steel white
Lamp type:T8 IP: 65 Cable gland: PG11
Applications: Factories, corridors, supermarket,school, hospital,
underground car park, store, tunnel, overpass and etc.



PZ-O-T8-136

MAIN FEATURES

Body: PC,ABS,HIPS Diffuser: PC, PS Reflector: Steel white
Lamp type:T8 IP: 65 Cable gland: PG11
Applications: Factories, corridors, supermarket,school, hospital,
underground car park, store, tunnel, overpass and etc.



Model	Size(mm)	CTN Size(mm)/pcs
PZ-O-T8-118	662*81*87	690*270*200/8PCS
PZ-O-T8-218	662*113*87	690*205*245/6PCS
PZ-O-T8-136	1265*81*87	1290*270*200/8PCS
PZ-O-T8-236	1265*113*87	1290*205*245/6PCS
PZ-O-T8-158	1567*81*87	1595*270*200/8PCS
PZ-O-T8-258	1567*113*87	1595*205*245/6PCS

PZ-Q-SMD-236

MAIN FEATURES

Body: PC,ABS Diffuser: PC(Frosted/Milky) Reflector: Steel white/Aluminum
IP: 65 Cable gland: PG11
Applications: Factories, corridors, supermarket,school, hospital,
underground car park, store, tunnel, overpass and etc.



Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-Q-SMD-258	54W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1500*76*70	1523*320*185/8PCS
PZ-Q-SMD-236	36W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1200*76*70	1223*320*185/8PCS
PZ-Q-SMD-218	18W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	600*76*70	623*320*185/8PCS



三防灯系列配件

Accessories for Waterproof lighting fixture



PZ-HP-B-36

MAIN FEATURES
Body: PC
IP: 54
Diffuser: PC
Applications: Factories, corridors, supermarket, school, hospital, underground car park, store, tunnel, overpass and etc.



Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-HP-B-18	18W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	600*75*25	620*280*175/20PCS
PZ-HP-B-30	30W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	900*75*25	920*280*175/20PCS
PZ-HP-B-36	36W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1200*75*25	1220*280*175/20PCS

PZ-HP-C-36

MAIN FEATURES
Body: PC
IP: 65
Diffuser: PC
Applications: Factories, corridors, supermarket, school, hospital, underground car park, store, tunnel, overpass and etc.




Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-HP-C-18	18W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	600*83*58	645*270*190/8PCS
PZ-HP-C-36	36W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1200*83*58	1245*270*190/8PCS
PZ-HP-C-54	54W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1500*83*58	1545*270*190/8PCS

三防灯系列 Waterproof lighting fixture

PZ-HP-E-18


MAIN FEATURES
Body: PC
IP: 65
Diffuser: PC
Applications: Factories, corridors, supermarket, school, hospital, underground car park, store, tunnel, overpass and etc.

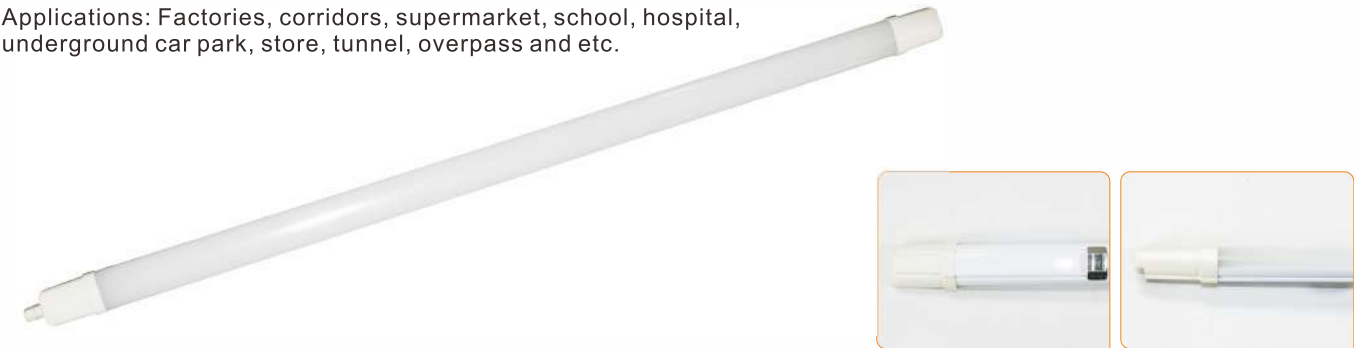

Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-HP-E-18	18W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1250*53*35	1280*215*130/10PCS
PZ-HP-E-24	24W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1550*53*35	1580*215*130/10PCS

PZ-HP-F-40

MAIN FEATURES
Body: PC
IP: 65
Diffuser: PC
Applications: Factories, corridors, supermarket, school, hospital, underground car park, store, tunnel, overpass and etc.

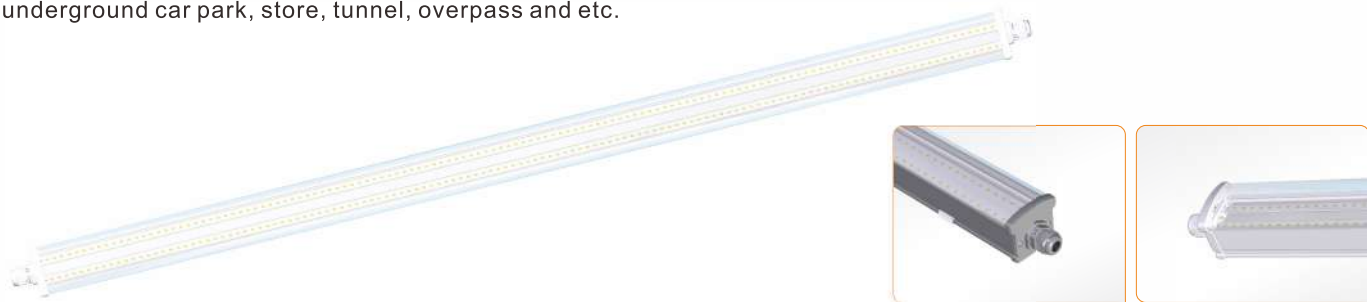

Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Size(mm)	CTN Size(mm)/pcs
PZ-HP-F-20	20W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	630*61*53	650*247*147/8PCS
PZ-HP-F-40	40W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1230*61*53	1250*247*147/8PCS
PZ-HP-F-50	50W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1530*61*53	1550*247*147/8PCS
PZ-HP-F-50	60W	AC110-265V	90-110Lm/W	3000-6500K	≥70/≥80	1830*61*53	1850*247*147/8PCS

T-POLUX LIGHT

ISO9001:2015 CE CCC GS RoHS REACH EMC CAA amfori BSCI



PZ-DF-A-36

MAIN FEATURES

Body: Steel white Diffuser: PC IP:20
Applications: Office, library, classrooms, conference and etc.



Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-DF-A-18	18W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	600*60*25	610*260*135/20PCS
PZ-DF-A-36	36W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1200*60*25	1210*260*135/20PCS
PZ-DF-A-48	48W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1500*60*25	1510*260*135/20PCS

PZ-DF-C-36

MAIN FEATURES

Body: Steel white Diffuser: PC IP:20
Applications: Office, library, classrooms, conference and etc.



Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-DF-C-18	18W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	600*55*33	610*380*120/20PCS
PZ-DF-C-36	36W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1200*55*33	1210*380*120/20PCS
PZ-DF-C-48	48W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1500*55*33	1510*380*120/20PCS

PZ-DF-B-36

MAIN FEATURES

Body: Steel white Diffuser: PC IP:20
Applications: Office, library, classrooms, conference and etc.



Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-DF-B-18	18W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	600*75*25	610*295*165/20PCS
PZ-DF-B-36	36W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1200*75*25	1210*295*165/20PCS
PZ-DF-B-48	48W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1500*75*25	1510*295*165/20PCS

PZ-DF-D-36

MAIN FEATURES

Body: Steel white Diffuser: PC IP:20
Applications: Office, library, classrooms, conference and etc.




Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-DF-D-18	18W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	600*100*33	620*345*225/20PCS
PZ-DF-D-36	36W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1200*100*33	1220*345*225/20PCS
PZ-DF-D-48	48W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1500*100*33	1520*345*225/20PCS



PZ-DF-E-36

MAIN FEATURES

Body: Steel white Diffuser: PC IP:20
Applications: Office, library, classrooms, conference and etc.

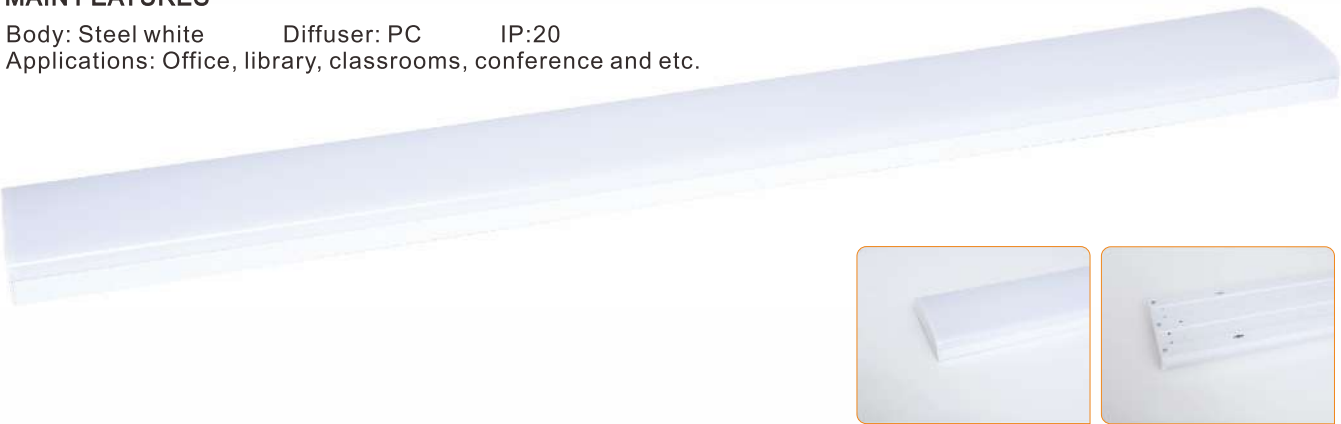

Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-DF-E-20	20W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	600*160*65	620*225*350mm/6pcs
PZ-DF-E-45	45W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1200*160*65	1220*225*350mm/6pcs
PZ-DF-E-58	58W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1500*160*65	1500*225*350mm/6pcs

PZ-DF-G-36

MAIN FEATURES

Body: Steel white Diffuser: PC IP:20
Applications: Office, library, classrooms, conference and etc.



Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-DF-G-18	18W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	628*117*42	650*270*240mm/12pcs
PZ-DF-G-36	36W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1238*117*42	1260*270*240mm/12pcs
PZ-DF-G-54	54W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1538*117*42	1560*270*240mm/12pcs

PZ-DF-F-18



Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-DF-F-18	18W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	600*100*58	620*265*230mm/8pcs
PZ-DF-F-36	36W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1200*100*58	1220*265*230mm/8pcs
PZ-DF-F-54	54W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1500*100*58	1500*265*230mm/8pcs

PZ-DF-H-25



Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-DF-H-25	25W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	600*110*31	625*195*245mm/10pcs
PZ-DF-H-45	45W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1200*110*31	1225*195*245mm/10pcs

PZ-DF-K-36

MAIN FEATURES

Body: Steel white Diffuser: PC IP:20
Applications: Office, library, classrooms, conference and etc.




Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-DF-K-18	18W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	600*120*39	620*265*265mm/10pcs
PZ-DF-K-36	36W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1200*120*39	1220*265*265mm/10pcs
PZ-DF-K-48	54W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1500*120*39	1520*265*265mm/10pcs

PZ-DF-L-T8-236

MAIN FEATURES


Body: Steel white Diffuser: PC, PS IP:20
Lamp type: T8
Applications: Office, library, classrooms, conference and etc.

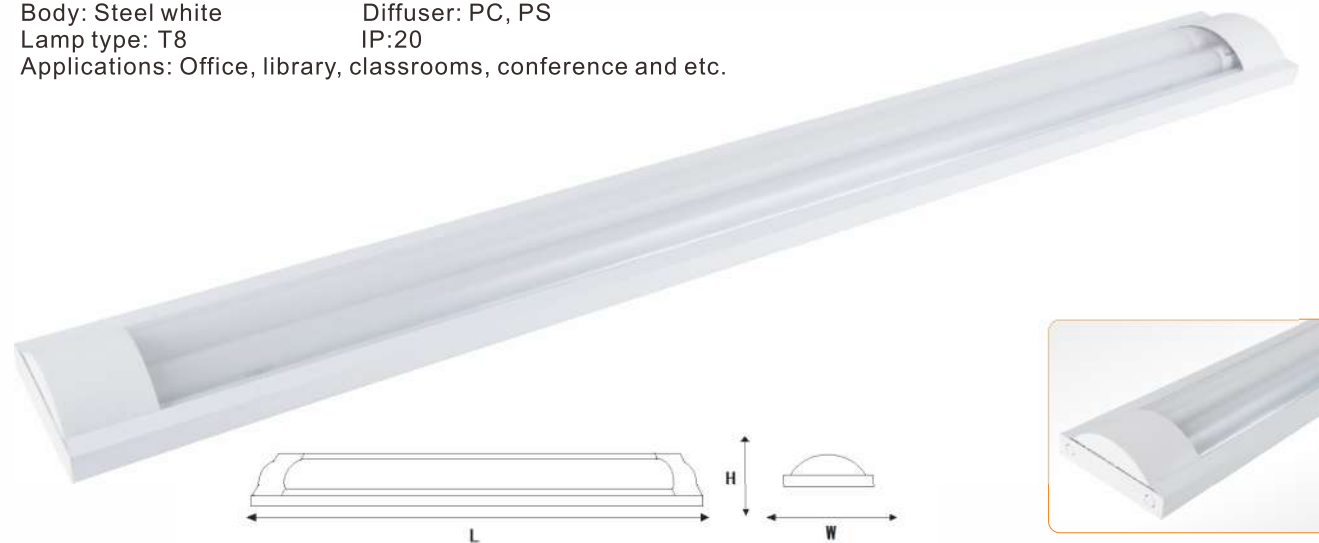

PZ-DF-L-T8-236

MAIN FEATURES

Body: Steel white Diffuser: PC, PS
Lamp type: T8 IP:20
Applications: Office, library, classrooms, conference and etc.

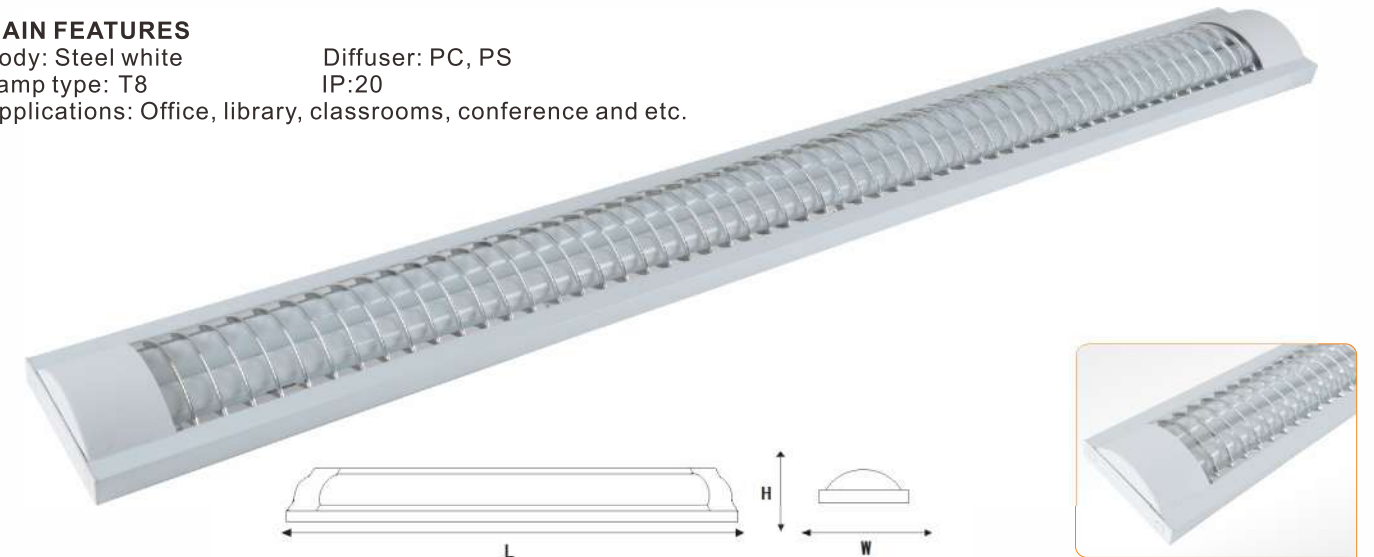


Model	Size(mm)	CTN Size(mm)/pcs
PZ-DF-L-T8-218	622*130*45	650*275*295mm/10pcs
PZ-DF-L-T8-236	1232*130*45	1260*275*295mm/10pcs
PZ-DF-L-T8-118	622*95*41	650*270*210mm/10pcs
PZ-DF-L-T8-136	1232*95*41	1260*270*210mm/10pcs

PZ-DF-L-236

MAIN FEATURES

Body: Steel white Diffuser: PC, PS IP:20
Applications: Office, library, classrooms, conference and etc.

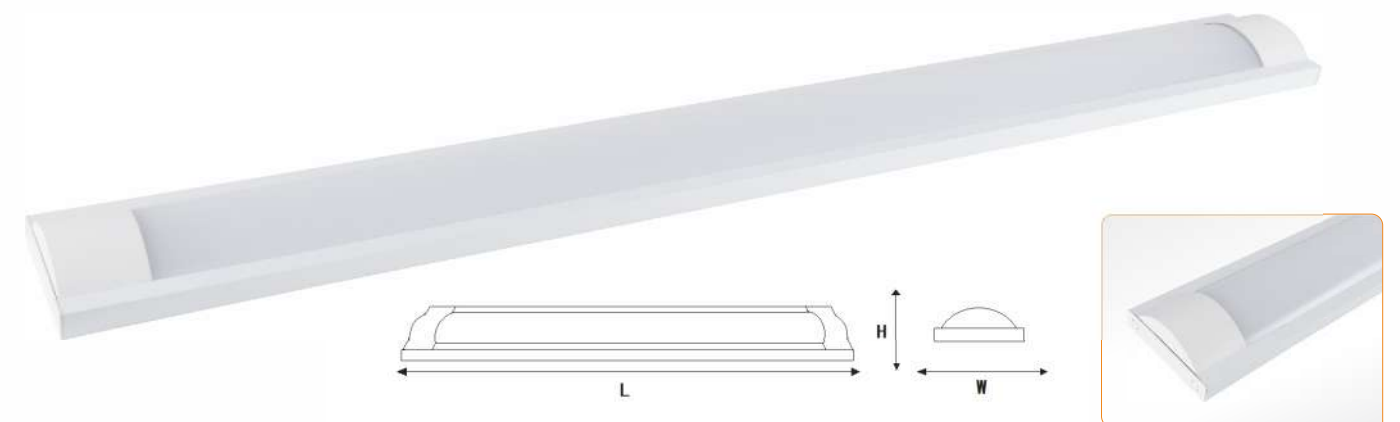

Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-DF-L-218	18W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	622*130*45	650*275*295mm/10pcs
PZ-DF-L-236	36W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1232*130*45	1260*275*295mm/10pcs
PZ-DF-L-118	9W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	622*95*41	650*270*210mm/10pcs
PZ-DF-L-136	18W	AC110-265V	80-100Lm/W	3000-6500K	≥70/≥80	1232*95*41	1260*270*210mm/10pcs




净化灯 Dustproof lighting fixture

PZ-DF-M-24

MAIN FEATURES

Body: Steel white Diffuser: PC IP:20
Applications: Office, library, classrooms, conference and etc.

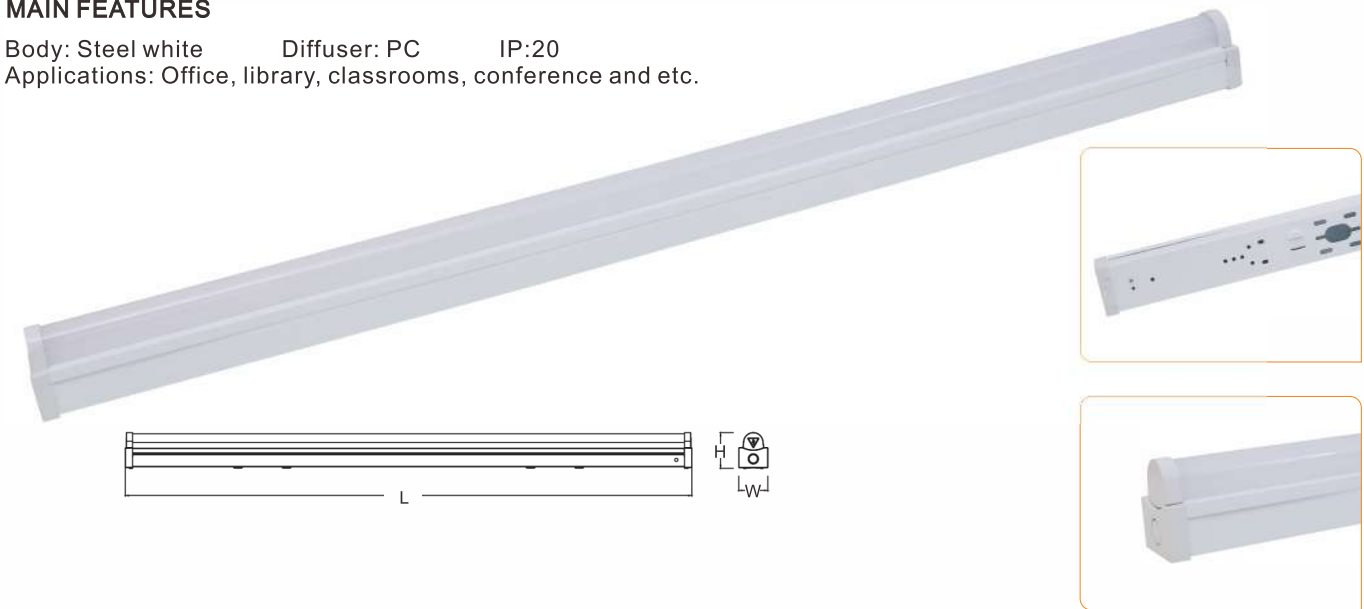

Model	Rated Power	Input Voltage	Lm/W	CCT	CRI(Ra)	Product size	CTN Size(mm)/pcs
PZ-DF-M-24	24W/40W	AC110-265V	100-130Lm/W	3000-6500K	≥70/≥80	1166*60*75	1186*395*175mm/12pcs
PZ-DF-M-28	28W/50W	AC110-265V	100-130Lm/W	3000-6500K	≥70/≥80	1466*60*75	1486*330*175mm/10pcs
PZ-DF-M-60	60W	AC110-265V	100-130Lm/W	3000-6500K	≥70/≥80	1766*60*75	1786*270*175mm/8pcs

PZ-DF-Y-T8-236

MAIN FEATURES

Body: Steel white Diffuser: PC, PS
Lamp type: T8 IP:20
Applications: Office, library, classrooms, conference and etc.



Model	size(mm)	CTN Size(mm)/pcs
PZ-DF-Y-T8-258	1580*153*65	1590*225*330/6PCS
PZ-DF-Y-T8-236	1250*153*65	1270*225*330/6PCS
PZ-DF-Y-T8-218	650*153*65	665*225*330/6PCS

吸顶灯 LED ceiling lamp

PZ-CL01-Y8



Model	Material	Watt	Input Voltage	LED Chip	Lumen	CCT	Ra	lamp size(mm)	carton size(mm)
PZ-CL01-Y8	ABS+PC	8W	AC110-265V	2835	70-90Lm/W	3000-6500K	≥70/≥80	φ150*49	565*325*170/20pcs
PZ-CL01-Y14	ABS+PC	14W	AC110-265V	2835	70-90Lm/W	3000-6500K	≥70/≥80	φ190*49	565*405*210/20pcs

PZ-CL01-T8



Model	Material	Watt	Input Voltage	LED Chip	Lumen	CCT	Ra	lamp size(mm)	carton size(mm)
PZ-CL01-T8	ABS+PC	8W	AC110-265V	2835	70-90Lm/W	3000-6500K	≥70/≥80	96*192*43	495*215*210/20pcs
PZ-CL01-T14	ABS+PC	14W	AC110-265V	2835	70-90Lm/W	3000-6500K	≥70/≥80	105*210*43	495*235*230/20pcs

PZ-CL02-Y220



Model	Material	Watt	Input Voltage	LED Chip	Lumen	CCT	Ra	lamp size(mm)	carton size(mm)
PZ-CL02-Y220	ABS+PC	12W	AC110-265V	2835	70-90Lm/W	3000-6500K	≥70/≥80	Ø220×65	465*365*240/10pcs
PZ-CL02-Y280	ABS+PC	18W	AC110-265V	2835	70-90Lm/W	3000-6500K	≥70/≥80	Ø280×65	585*365*300/10pcs
PZ-CL02-Y330	ABS+PC	24W	AC110-266V	2835	70-90Lm/W	3000-6500K	≥70/≥80	Ø330×65	675*365*350/10pcs

PZ-CL02-F220



Model	Material	Watt	Input Voltage	LED Chip	Lumen	CCT	Ra	lamp size(mm)	carton size(mm)
PZ-CL02-F220	ABS+PC	12W	AC110-265V	2835	70-90Lm/W	3000-6500K	≥70/≥80	220×220×65	465*365*240/10pcs
PZ-CL02-F280	ABS+PC	18W	AC110-265V	2835	70-90Lm/W	3000-6500K	≥70/≥80	280×280×65	585*365*300/10pcs
PZ-CL02-F330	ABS+PC	24W	AC110-266V	2835	70-90Lm/W	3000-6500K	≥70/≥80	330×330×65	675*365*350/10pcs

PZ-CL03-Y18



Model	Material	Watt	Input Voltage	LED Chip	Lumen	CCT	Ra	lamp size(mm)	carton size(mm)
PZ-CL03-Y18	Alu+ABS+PC	18W	AC110-265V	2835	70-90Lm/W	3000-6500K	≥70/≥80	φ300*50	625*290*310/10pcs

PZ-CL03-F18



Model	Material	Watt	Input Voltage	LED Chip	Lumen	CCT	Ra	lamp size(mm)	carton size(mm)
PZ-CL03-F18	Alu+ABS+PC	18W	AC110-265V	2835	70-90Lm/W	3000-6500K	≥70/≥80	300*300*50	625*290*310/10pcs

PZ-MB-A-F8C




Model	Material	Watt	Input Voltage	LED Chip	Lumen	Ra	CCT	lamp size(mm)	Hole size (mm)	carton size(mm)
PZ-MB-A-F3C	PC+Aluminum	3W	AC85-265V	2835	55Lm/W	≥70/≥80	3000-6500K	93*93*27	80*80	465x210x210/60pcs
PZ-MB-A-F4C	PC+Aluminum	6W	AC85-265V	2835	60Lm/W	≥70/≥80	3000-6500K	118*118*27	100*100	465x275x255/60pcs
PZ-MB-A-F5C	PC+Aluminum	10W	AC85-265V	2835	65Lm/W	≥70/≥80	3000-6500K	143*143*27	125*125	465x455x445/60pcs
	PC+Aluminum	12W	AC85-265V	2835	65Lm/W	≥70/≥80	3000-6500K	143*143*27	125*125	465x455x325/60pcs
PZ-MB-A-F6C	PC+Aluminum	15W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	168*168*28	150*150	325x375x355/40pcs
	PC+Aluminum	18W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	168*168*28	150*150	325x375x355/40pcs
PZ-MB-A-F8C	PC+Aluminum	20W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	218*218*28	200*200	480x455x245/30pcs
	PC+Aluminum	24W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	218*218*28	200*200	480x455x245/30pcs

PZ-MB-A-Y8C



Model	Material	Watt	Input Voltage	LED Chip	Lumen	Ra	CCT	lamp size(mm)	Hole size (mm)	carton size(mm)
PZ-MB-A-Y3C	PC+Aluminum	3W	AC85-265V	2835	55Lm/W	≥70/≥80	3000-6500K	Ø93*27	Ø80	465x205x205/60pcs
PZ-MB-A-Y4C	PC+Aluminum	6W	AC85-265V	2835	60Lm/W	≥70/≥80	3000-6500K	Ø118*27	Ø100	465x255x255/60pcs
PZ-MB-A-Y5C	PC+Aluminum	10W	AC85-265V	2835	65Lm/W	≥70/≥80	3000-6500K	Ø143*27	Ø125	465x305x305/60pcs
	PC+Aluminum	12W	AC85-265V	2835	65Lm/W	≥70/≥80	3000-6500K	Ø143*27	Ø125	465x305x305/60pcs
PZ-MB-A-Y6C	PC+Aluminum	15W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	Ø168*28	Ø150	325x355x355/40pcs
	PC+Aluminum	18W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	Ø168*28	Ø150	325x355x355/40pcs
PZ-MB-A-Y8C	PC+Aluminum	20W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	Ø218*28	Ø200	480x480x235/30pcs
	PC+Aluminum	24W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	Ø218*28	Ø200	480x480x235/30pcs

PZ-MB-A-MF8C

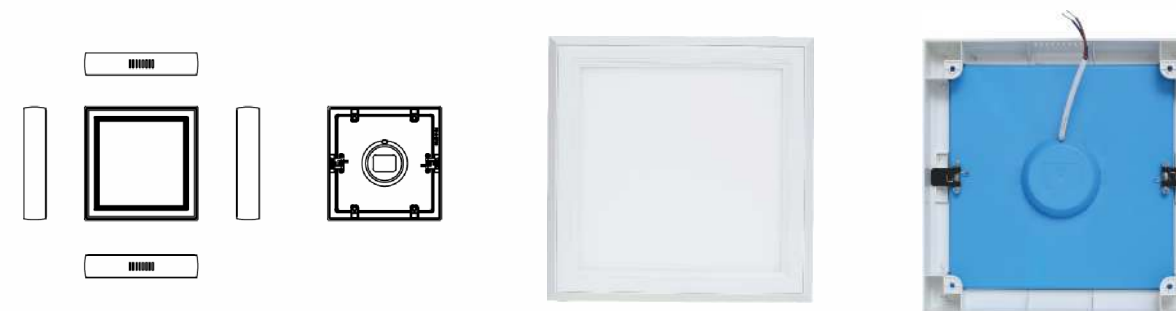


Model	Material	Watt	Input Voltage	LED Chip	Lumen	Ra	CCT	lamp size(mm)	carton size(mm)
PZ-MB-A-MF4C	PC+Aluminum	6W	AC85-265V	2835	60Lm/W	≥70/≥80	3000-6500K	140*140*35	425*305*305/40pcs
PZ-MB-A-MF5C	PC+Aluminum	10W	AC85-265V	2835	65Lm/W	≥70/≥80	3000-6500K	165*165*35	425*355*355/40pcs
	PC+Aluminum	12W	AC85-265V	2835	65Lm/W	≥70/≥80	3000-6500K	165*165*35	425*355*355/40pcs
PZ-MB-A-MF6C	PC+Aluminum	15W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	190*190*35	595*220*405/30pcs
	PC+Aluminum	18W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	190*190*35	595*220*405/30pcs
PZ-MB-A-MF8C	PC+Aluminum	20W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	240*240*35	505*425*260/20pcs
	PC+Aluminum	24W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	240*240*35	505*425*260/20pcs

PZ-MB-A-MY8C



Model	Material	Watt	Input Voltage	LED Chip	Lumen	Ra	CCT	lamp size(mm)	carton size(mm)
PZ-MB-A-MY4C	PC+Aluminum	6W	AC85-265V	2835	60Lm/W	≥70/≥80	3000-6500K	Ø140*35	425*305*305/40pcs
PZ-MB-A-MY5C	PC+Aluminum	10W	AC85-265V	2835	65Lm/W	≥70/≥80	3000-6500K	Ø165*35	425*355*355/40pcs
	PC+Aluminum	12W	AC85-265V	2835	65Lm/W	≥70/≥80	3000-6500K	Ø165*35	425*355*355/40pcs
PZ-MB-A-MY6C	PC+Aluminum	15W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	Ø190*35	595*220*405/30pcs
	PC+Aluminum	18W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	Ø190*35	595*220*405/30pcs
PZ-MB-A-MY8C	PC+Aluminum	20W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	Ø240*35	505*425*260/20pcs
	PC+Aluminum	24W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	Ø240*35	505*425*260/20pcs

PZ-MB-B-F6C

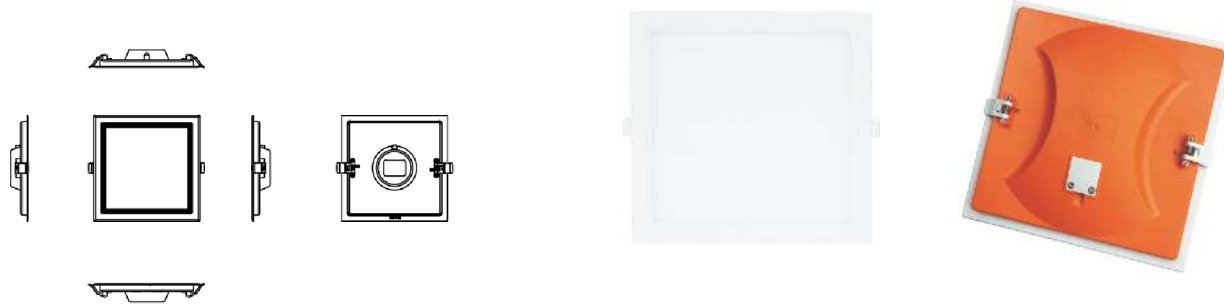

Model	Material	Watt	Input Voltage	LED Chip	Lumen	Ra	CCT	lamp size(mm)	Hole size (mm)	Carton size(mm)
PZ-MB-B-F4C	PC+Aluminum	6W	AC85-265V	2835	60Lm/W	≥70/≥80	3000-6500K	118*118*30	100*100	415*345*310/60pcs
PZ-MB-B-F5C	PC+Aluminum	10W	AC85-265V	2835	65Lm/W	≥70/≥80	3000-6500K	143*143*30	125*125	505*345*370/60pcs
	PC+Aluminum	12W	AC85-265V	2835	65Lm/W	≥70/≥80	3000-6500K	143*143*30	125*125	505*345*370/60pcs
PZ-MB-B-F6C	PC+Aluminum	15W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	168*168*31	150*150	420*355*390/40pcs
	PC+Aluminum	18W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	168*168*31	150*150	420*355*390/40pcs
PZ-MB-B-F8C	PC+Aluminum	20W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	218*218*32	200*200	490*365*270/20pcs
	PC+Aluminum	24W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	218*218*32	200*200	490*365*270/20pcs

PZ-MB-B-MF6C



Model	Material	Watt	Input Voltage	LED Chip	Lumen	Ra	CCT	lamp size(mm)	Carton size(mm)
PZ-MB-B-MF4C	PC+Aluminum	6W	AC85-265V	2835	65Lm/W	≥70/≥80	3000-6500K	140*140*35	425*305*305/40pcs
PZ-MB-B-MF5C	PC+Aluminum	10W	AC85-265V	2835	75Lm/W	≥70/≥80	3000-6500K	165*165*35	425*355*355/40pcs
	PC+Aluminum	12W	AC85-265V	2835	75Lm/W	≥70/≥80	3000-6500K	165*165*35	425*355*355/40pcs
PZ-MB-B-MF6C	PC+Aluminum	15W	AC85-265V	2835	80Lm/W	≥70/≥80	3000-6500K	190*190*35	595*220*405/30pcs
	PC+Aluminum	18W	AC85-265V	2835	80Lm/W	≥70/≥80	3000-6500K	190*190*35	595*220*405/30pcs
PZ-MB-B-MF8C	PC+Aluminum	20W	AC85-265V	2835	80Lm/W	≥70/≥80	3000-6500K	240*240*35	505*425*260/20pcs
	PC+Aluminum	24W	AC85-265V	2835	80Lm/W	≥70/≥80	3000-6500K	240*240*35	505*425*260/20pcs

PZ-MB-B-Y6C



Model	Material	Watt	Input Voltage	LED Chip	Lumen	Ra	CCT	lamp size(mm)	Hole size (mm)	Carton size(mm)
PZ-MB-B-Y4C	PC+Aluminum	6W	AC85-265V	2835	60Lm/W	≥70/≥80	3000-6500K	Φ118*30	Φ100	415*345*280/60pcs
PZ-MB-B-Y5C	PC+Aluminum	10W	AC85-265V	2835	65Lm/W	≥70/≥80	3000-6500K	Φ143*30	Φ125	505*345*340/60pcs
	PC+Aluminum	12W	AC85-265V	2835	65Lm/W	≥70/≥80	3000-6500K	Φ143*30	Φ125	505*345*340/60pcs
PZ-MB-B-Y6C	PC+Aluminum	15W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	Φ168*31	Φ150	395*355*395/40pcs
	PC+Aluminum	18W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	Φ168*31	Φ150	395*355*395/40pcs
PZ-MB-B-Y8C	PC+Aluminum	20W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	Φ218*32	Φ200	490*365*255/20pcs
	PC+Aluminum	24W	AC85-265V	2835	70Lm/W	≥70/≥80	3000-6500K	Φ218*32	Φ200	490*365*255/20pcs

PZ-MB-B-MY6C



Model	Material	Watt	Input Voltage	LED Chip	Lumen	Ra	CCT	lamp size(mm)	Carton size(mm)
PZ-MB-B-MY4C	PC+Aluminum	6W	AC85-265V	2835	65Lm/W	≥70/≥80	3000-6500K	Φ140*35	425*305*305/40pcs
PZ-MB-B-MY5C	PC+Aluminum	10W	AC85-265V	2835	75Lm/W	≥70/≥80	3000-6500K	Φ165*35	425*355*355/40pcs
	PC+Aluminum	12W	AC85-265V	2835	75Lm/W	≥70/≥80	3000-6500K	Φ165*35	425*355*355/40pcs
PZ-MB-B-MY6C	PC+Aluminum	15W	AC85-265V	2835	80Lm/W	≥70/≥80	3000-6500K	Φ190*35	595*220*405/30pcs
	PC+Aluminum	18W	AC85-265V	2835	80Lm/W	≥70/≥80	3000-6500K	Φ190*35	595*220*405/30pcs
PZ-MB-B-MY8C	PC+Aluminum	20W	AC85-265V	2835	80Lm/W	≥70/≥80	3000-6500K	Φ240*35	505*425*260/20pcs
	PC+Aluminum	24W	AC85-265V	2835	80Lm/W	≥70/≥80	3000-6500K	Φ240*35	505*425*260/20pcs



PZ-MB-C-F12W



Model	Material	Watt	Input Voltage	LED Chip	Lumen	CCT	Ra	Lamp size(mm)	Hole size(mm)	carton size(mm)
PZ-MB-C-F3W	Aluminum	3W	AC110-265V	2835	50Lm/W	3000-6500K	≥70/ ≥80	85*85*10	72*72	385*308*225/40pcs
PZ-MB-C-F6W	Aluminum	6W	AC110-265V	2835	60Lm/W	3000-6500K	≥70/ ≥80	120*120*10	106*106	568*385*225/40pcs
PZ-MB-C-F9W	Aluminum	9W	AC110-265V	2835	65Lm/W	3000-6500K	≥70/ ≥80	146*146*10	133*133	575*385*275/30pcs
PZ-MB-C-F12W	Aluminum	12W	AC110-265V	2835	65Lm/W	3000-6500K	≥70/ ≥80	170*170*10	160*160	575*385*275/30pcs
PZ-MB-C-F18W	Aluminum	18W	AC110-265V	2835	70Lm/W	3000-6500K	≥70/ ≥80	220*220*10	208*208	494*385*325/20pcs
PZ-MB-C-F24W	Aluminum	24W	AC110-265V	2835	80Lm/W	3000-6500K	≥70/ ≥80	295*295*10	280*280	320*320*265/10pcs

PZ-MB-C-MF12W



Model	Material	Watt	Input Voltage	LED Chip	Lumen	CCT	Ra	lamp size(mm)	carton size(mm)
PZ-MB-C-MF6W	Aluminum	6W	AC110-265V	2835	60Lm/W	3000-6500K	≥70/ ≥80	110*110*28	475*270*270/40pcs
PZ-MB-C-MF12W	Aluminum	12W	AC110-265V	2835	65Lm/W	3000-6500K	≥70/ ≥80	160*160*28	550*475*200/30pcs
PZ-MB-C-MF18W	Aluminum	18W	AC110-265V	2835	70Lm/W	3000-6500K	≥70/ ≥80	210*210*28	485*475*255/20pcs
PZ-MB-C-MF24W	Aluminum	24W	AC110-265V	2835	80Lm/W	3000-6500K	≥70/ ≥80	290*290*28	475*325*325/10pcs

PZ-MB-C-Y12W



Model	Material	Watt	Input Voltage	LED Chip	Lumen	CCT	Ra	Lamp size(mm)	Hole size(mm)	carton size(mm)
PZ-MB-C-Y3W	Aluminum	3W	AC110-265V	2835	50Lm/W	3000-6500K	≥70/ ≥80	φ 85*10	φ 72	385*308*225/40pcs
PZ-MB-C-Y6W	Aluminum	6W	AC110-265V	2835	60Lm/W	3000-6500K	≥70/ ≥80	φ 120*10	φ 106	568*385*225/40pcs
PZ-MB-C-Y9W	Aluminum	9W	AC110-265V	2835	65Lm/W	3000-6500K	≥70/ ≥80	φ 146*10	φ 133	575*385*275/30pcs
PZ-MB-C-Y12W	Aluminum	12W	AC110-265V	2835	65Lm/W	3000-6500K	≥70/ ≥80	φ 170*10	φ 160	575*385*275/30pcs
PZ-MB-C-Y18W	Aluminum	18W	AC110-265V	2835	70Lm/W	3000-6500K	≥70/ ≥80	φ 220*10	φ 208	494*385*325/20pcs
PZ-MB-C-Y24W	Aluminum	24W	AC110-265V	2835	80Lm/W	3000-6500K	≥70/ ≥80	φ 295*10	φ 280	320*320*265/10pcs

PZ-MB-C-MY12W



Model	Material	Watt	Input Voltage	LED Chip	Lumen	CCT	Ra	lamp size(mm)	carton size(mm)
PZ-MB-C-MY6W	Aluminum	6W	AC110-265V	2835	60Lm/W	3000-6500K	≥70/ ≥80	φ 110*28	475*270*270/40pcs
PZ-MB-C-MY12W	Aluminum	12W	AC110-265V	2835	65Lm/W	3000-6500K	≥70/ ≥80	φ 160*28	550*475*200/30pcs
PZ-MB-C-MY18W	Aluminum	18W	AC110-265V	2835	70Lm/W	3000-6500K	≥70/ ≥80	φ 210*28	485*475*255/20pcs
PZ-MB-C-MY24W	Aluminum	24W	AC110-265V	2835	80Lm/W	3000-6500K	≥70/ ≥80	φ 290*28	475*325*325/10pcs



工矿灯 LED High Bay Light

PZ-FL23-150



Model	Material	Watt	Input Voltage	Lumen	Ra	CCT	lamp size(mm)	carton size(mm)
PZ-FL23-100	Aluminum+PC	100W	AC110-265V	90-120Lm/W	≥70/≥80	3000-6500K	φ290*112	300*300*150/1pc
PZ-FL23-150	Aluminum+PC	150W	AC110-265V	90-120Lm/W	≥70/≥80	3000-6500K	φ340*119	350*350*155/1pc
PZ-FL23-200	Aluminum+PC	200W	AC110-265V	90-120Lm/W	≥70/≥80	3000-6500K	φ386*128	395*395*170/1pc

PZ-A-TUBE-18W



Model	Material	Input Voltage	Lumen	Ra	CCT	length (mm)	carton size(mm)
PZ-A-TUBE-9W	Aluminum Alloy+PC	AC110-265V	80-100Lm/W	≥70/≥80	3000-6500K	600	630*170*185mm/25pcs
PZ-A-TUBE-18W	Aluminum Alloy+PC	AC110-265V	80-100Lm/W	≥70/≥80	3000-6500K	1200	1230*170*185mm/25pcs
PZ-A-TUBE-24W	Aluminum Alloy+PC	AC110-265V	80-100Lm/W	≥70/≥80	3000-6500K	1500	1530*170*185mm/25pcs

灯管 LED Tube

PZ-N-TUBE-18W



Model	Material	Input Voltage	Lumen	Ra	CCT	length (mm)	carton size(mm)
PZ-N-TUBE-9W	Nano	AC110-265V	100-120Lm/W	≥70/≥80	3000-6500K	600	630*135*105mm/10pcs
PZ-N-TUBE-18W	Nano	AC110-265V	100-120Lm/W	≥70/≥80	3000-6500K	1200	1230*135*105mm/10pcs
PZ-N-TUBE-24W	Nano	AC110-265V	100-120Lm/W	≥70/≥80	3000-6500K	1500	1530*135*105mm/10pcs

T-POLUX LIGHT
LED LIGHTING FIXTURE
ZHEJIANG PO-LIGHT
ELECTRICAL APPLIANCE CO.,LTD

ISO9001:2015 CE CCC GS RoHS REACH EMC SAA amfori BSCI